


D135-1027-251 STD HEIGHT AFT CROSSTUBE

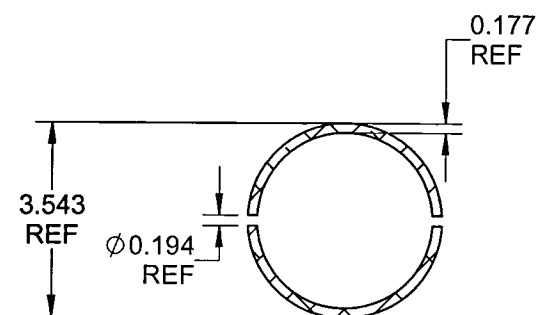

SECTION A-A
SCALE 2X

NOTES:

- NOTES:**

1) MATERIAL: MANUFACTURED FROM D6026-105
STRAIGHT LENGTH = 104.82±0.06 (BEFORE BENDING / TRIMMING)

2) FINISH: N/A

3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED

4) UNITS: INCHES UNLESS OTHERWISE NOTED

5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX

6) IDENTIFICATION: PER QSI 044 6.1

7) WEIGHT: 16.83 lbs

8) MAX TWIST: WITH XTUBE LAYED FLAT ON SURFACE, THE DIFFERENCE BETWEEN CUFF HEIGHTS FROM THE SURFACE SHALL BE NO LARGER THAN 0.25

9) HOLES TO BE ALIGNED WITHIN 0.005 IN RELATION TO THE HOLE ON OPPOSITE SIDE OF CROSSTUBE

10) EXTREME CARE MUST BE TAKEN TO PROTECT THE OUTSIDE SURFACE OF THE TUBE. THE OUTSIDE SURFACE MUST BE SMOOTH AND FREE FROM SURFACE DEFECTS SUCH AS SCRATCHES, NICKS, OR DENTS. DEFECTS UP TO 0.005" MAY BE BLENDED OUT LONGITUDINALLY. CIRCUMFERENTIAL GRIND MARKS ARE UNACCEPTABLE.

11) LIQUID PENETRANT INSPECT OUTSIDE SURFACE OF CROSSTUBE PER QSI 038. TO BE PERFORMED AFTER FINAL POST-BEND GRINDING. ANY ADDITIONAL GRINDING REQUIRES ANOTHER LPI INSPECTION.

12) MAXIMUM TUBE FLATTENING DUE TO BENDING IS 2% BASED ON OD.

RELEASED

2018 OCT 31 *dp*
ECN 18-834

D	MOVED GH AND STEP HOLES DIM 8.34 WAS 7.97	ZF	18.10.04
C	ZONE C2, 3.15 DIM WAS 4.00. ACCORDINGLY 15.61 WAS 16.38 AND 79.62 WAS 80.34. REASON: D5424-1 SPACER DELETED FROM INSTALLATION.	ML	17.09.07
B	CORRECTED TITLE ERROR, 3.13 WAS 3.15, 7.97 WAS 7.79. REASON: DESIGN UPDATE	ML	17.05.25
A	NEW ISSUE	ML	17.01.31
REV.	DESCRIPTION	BY	DATE
DESIGN	ML	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	ZF		
CHECKED	MW	DRAWING NO.	REV. D
MFG. APPR.	DD	D135-1027-251	SHEET 1 OF 1
APPROVED	ML	TITLE	SCALE
DE APPR.	CP <i>47</i>	STD HEIGHT AFT XTUBE	NTS
DATE	18.10.04	COPYRIGHT © 2017 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	